
Electrolux

Modular Preparation 1600 mm Hot Wall Cupboard with **Sliding Doors**

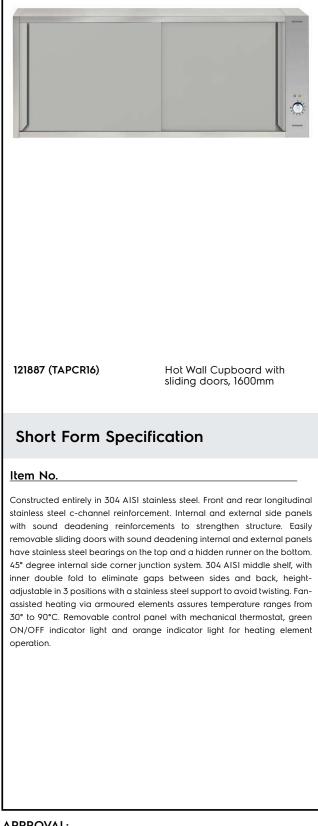

TEM #	
10DEL #	
IAME #	
ils #	
AIA #	

Main Features

• Extremely easy to clean thanks to the smooth edges.

Construction


- Front and rear lengthwise stainless steel cchannel reinforcement, 15/10 (16 gauges).
- Internal sides supporting the structure to have 45° degrees internal side corners junction system.
- 30 mm high middle-shelf in AISI 304 stainless steel, height-adjustable in 3 positions, with inner double fold to eliminate gaps between sides and back.
- 660 mm body height is surrounded by a stainless steel structure.
- Sliding doors, with sound deadening internal and external panels, run on the upper part on the s/s bearings and on the lower part on a hidden runner. Doors are easy to remove thus facilitating cleaning procedures.
- Fan assisted heating via amored elements ensuring temperature range from 30° to 90°C.
- Detachable control panel with mechanical thermostat and on/off green and orange indicator light for heating element operation.
- Constructed entirely in AISI 304 Stainless Steel with Scotch Brite finish.

Optional Accessories

- Kit of 1 halogen lamp for wall PNC 855803 □ cupboards, 600mm
- Kit of 1 halogen lamp for wall PNC 855804 □ cupboards, 900mm

APPROVAL:



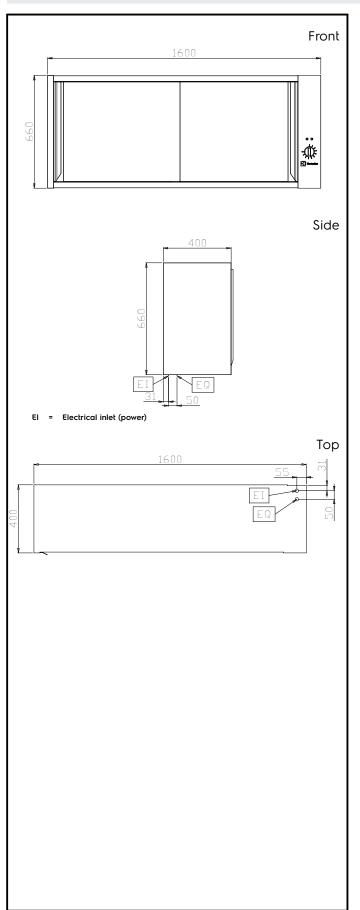

Modular Preparation 1600 mm Hot Wall Cupboard with Sliding Doors

Electric

Supply voltage: 121887 (TAPCR16) Total Watts:	230 V/1 ph/50/60 Hz 1.4 kW
Key Information:	
Cabinet width: Cabinet depth: Cabinet height: N° of doors: Door Type: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Net weight:	1430 mm 295 mm 590 mm 2 Sliding 1600 mm 400 mm 660 mm 61 kg

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.