



Rolitto



Réglage variable pour les 2 vitesses.
Variable speed setting for the 2 gears.
Variabele instelling voor de 2 snelheden.





- Programmierbare Zeitschaltuhr.
- Programador horario programable.
- Timer programmabile.



- Sicherheitsgitter als Option.
- Rejilla de seguridad metálica opcional.
- Griglia di sicurezza opzionale.

- 2 Gänge (jeweils 10 Stufen regelbar) + Rückwärtsgang
- Rotación inversa y 10 ajustes variables para las 2 velocidades.
- Rotazione inversa e 10 impostazioni variabili per le 2 velocità.

- Einfache digitale Steuerung.
- Control digital fácil de usar.
- Comando digitale semplice da utilizzare.

- Monté sur roulettes, facile à déplacer.
- Mounted on castors, easily movable.
- Gemonteerd op wieltjes, makkelijk te verplaatsen.

- Kraftübertragung mit Riemenantrieb.
- Transmisión por correa.
- Trasmissione a cinghia.

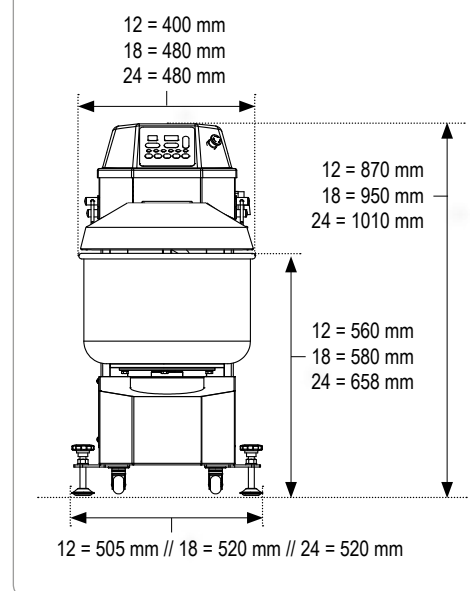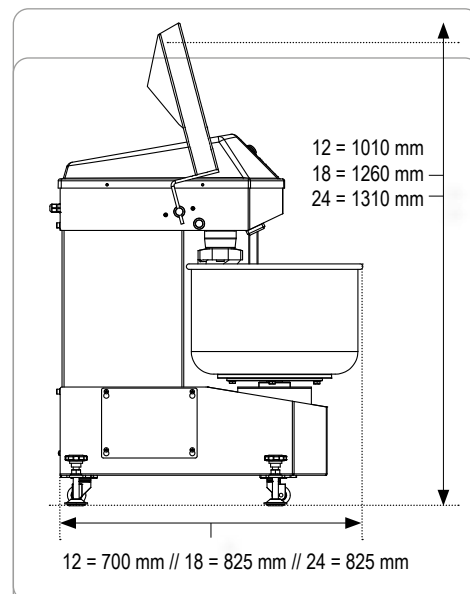

ECO	12	18	24
Capacité pâte Dough capacity Deegcapaciteit	1,5 - 12 kg	2,5 - 18 kg	3 - 24 kg
Capacité farine Flour capacity Bloemcapaciteit	1 - 8 kg	1,5 - 12 kg	2 - 16 kg
Coulage Liquid Vloeistof	0,5 - 4 L	0,75 - 6 L	1 - 8 L
Puissance moteur Motor power Motorvermogen	1,3 kW	1,8 kW	2,2 kW
Trs/min variable Variable R.P.M. Variabele omw/min			65 - 320
Spirale Spiral Spiraal			6,5 - 32
Cuve Bowl Kuip			
Poids net machine Net weight machine Nettogewicht machine	105 kg	130 kg	145 kg
Voltage Voltage Spanning	230V 50Hz 1Ph		