
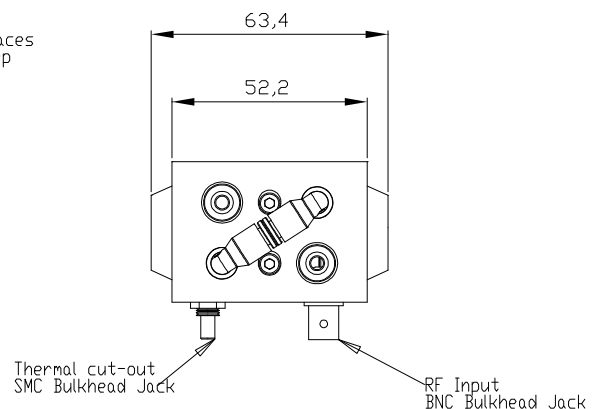
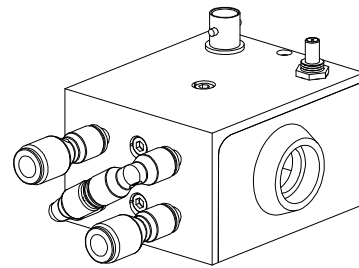


I-QS041-4S4G-x5-ST1 Specification:

Model No:	I-QS041-4S4G-x5-ST1
Device:	AO Q-Switch
Interaction material:	Fused Silica
Wavelength:	1064nm
Damage threshold:	> 1GW/cm ²
AR coating reflectivity:	< 0.2% per surface
Transmission:	> 99.6%
Frequency:	40.68MHz
Optical polarisation:	Random
Acoustic mode:	Shear
Active aperture:	4mm
Loss modulation:	~ 85%
Maximum RF power:	100W
Water flow rate:	> 0.2l / minute
Recommended water temperature:	22°C to 32°C
Thermal switch cut-off:	55°C ± 5%
Housing:	Stallion, St/St 316 water channels
Water connectors:	To be specified ¹

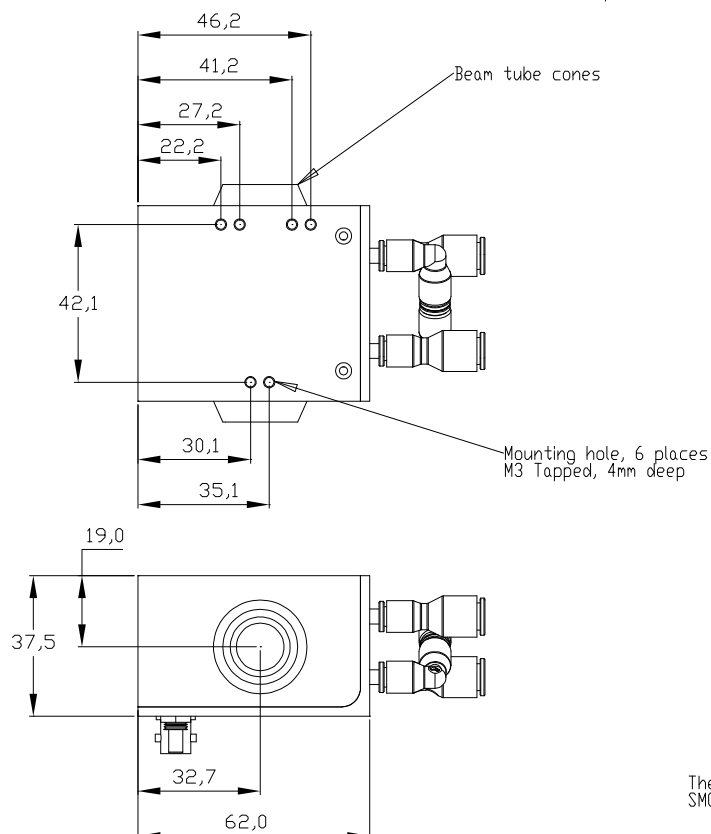

¹ Choice of 4mm or 6mm OD / straight or right angle push-in type, 6mm OD straight push-in type illustrated.

Revision No: 1.1
Date: 16/12/14

Contact: sales@goochandhousego.com

www.goochandhousego.com

As part of our policy of continuous product improvement we reserve the right to change specifications at any time