


SPECIFICATIONS

AO Medium	TeO ₂
Acoustic Mode	Longitudinal
Acoustic Velocity	4.20 mm/μs
Wavelength	1066-1100 nm
Input Polarization	Linear
Output Polarization	
Insertion Loss	<3%
Center Frequency (Fc)	75 MHz
RF Bandwidth	32MHz, Goal 40MHz
RF Power	4W max.
Active Aperture	2.5 mm dia.
Average Diffraction Efficiency	N/A
Intensity Variation Across Bandwidth	N/A
Min Diffraction Efficiency	70%
Peak Valley at 633 nm	N/A
RMS at 633 nm	N/A
VSWR	2.0:1
Scan Angle	N/A
Time Bandwidth	N/A

OUTLINE DRAWING

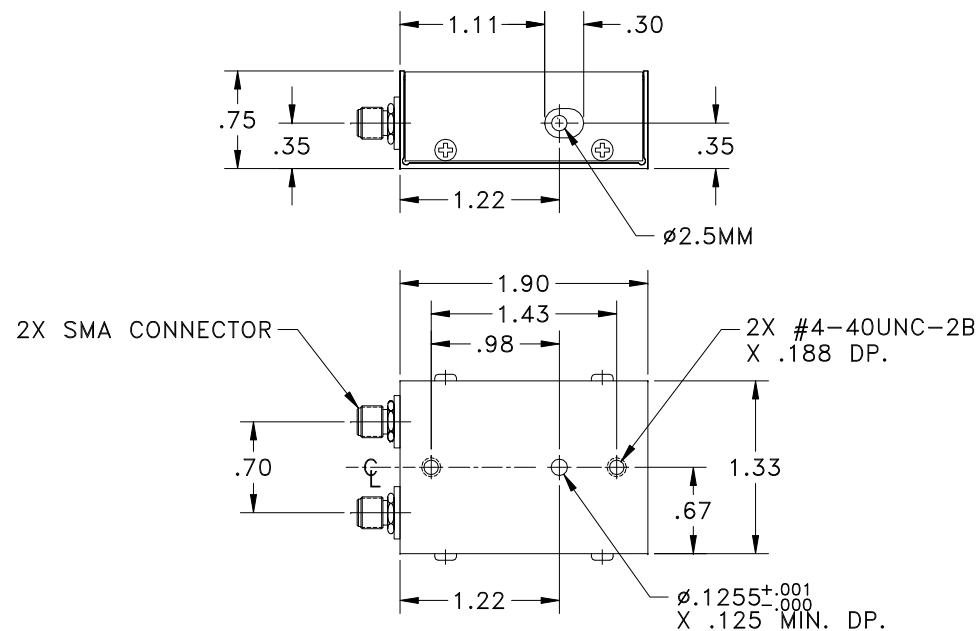

Notes:

1. Input Impedance is 50 Ohms.
2. Electrode: Two Element Phased Array
3. RoHS Compliant

Document

09/13/13

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Geri Scholz 9/3/2013	Gooch & Housego	
MATERIAL:	CHK		DESCRIPTION: AODF 4075-2	
FINISH: 	APP		PART NUMBER:	97-02823-52
	APP		REV:	C
			SHEET 1 OF 1	