


AO Medium	Crystalline Quartz	
Acoustic Velocity	5.74 mm/μs	
Active Aperture*	2.5 mm 'L' X	0.25 mm 'H'
Center Frequency (Fc)	200 MHz	
RF Bandwidth	100 MHz @	-5 dB Return Loss
Input Impedance	50 Ohms Nominal	
VSWR @ Fc	1.5 :1 Max	
Wavelength	257 nm	
Insertion Loss	5 % Max	
Reflectivity per Surface	1 % Max	
Anti-Reflection Coating	MIL-C-48497	
Optical Power Density	N/A W/mm ²	
Contrast Ratio	1000 :1 Min	
Polarization	90 ° To Mounting Plane	

Wavelength (nm)	257
Operational RF Power (W)	1.
Bragg Angle (mr)	4.5
Beam Separation (mr)	9

Beam Diameter (μm)	70
<i>at Wavelength (nm)</i>	257
Diffraction Efficiency (%)	75
Rise Time (nsec)	10
Modulation Bandwidth	NA
Beam Ellipticity	NA

Outline Drawing:

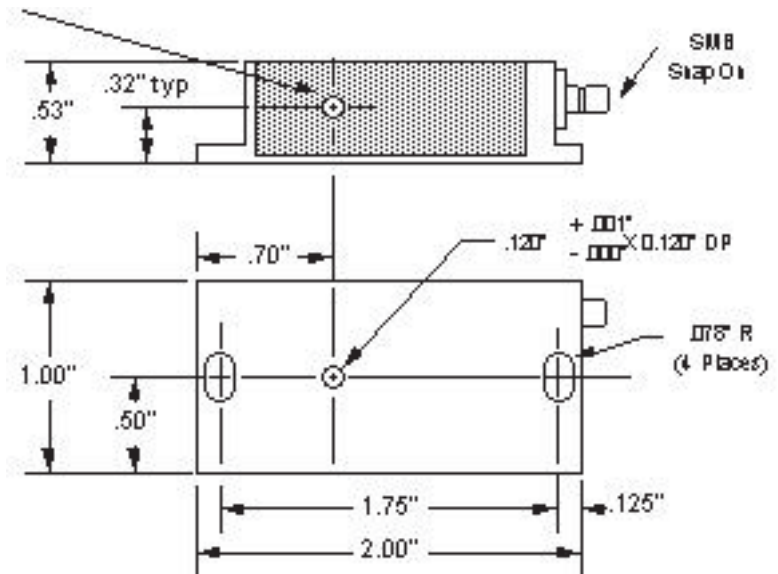

Document
08/06/18
Control

Notes:
 * Saturation RF Power is 1 Watts
 DE is measured @488, DE @488 > 32%, 70 micron spot, 1 watt RF.

THIS DOCUMENT IS THE PROPERTY OF GOOCH AND HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH AND HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH AND HOUSEGO.

TOLERANCES: XX ± .01 .XXX ± .005	DR	G. Scholz 7/18/2018	 Gooch & Housego		
	CHK		DESCRIPTION: AOMO 3200-1220 257 nm (UV)		
MATERIAL: 	APP				
FINISH: 	APP		PART NUMBER: 97-02513-01	REV: C	SHEET 1 OF 1