


AO Medium	Crystalline Quartz		
Acoustic Velocity	5.74 mm/μs		
Active Aperture*	0.5 mm 'L' X	0.25 mm 'H'	
Center Frequency (Fc)	200 MHz		
RF Bandwidth	100 MHz @	-5 dB	Return Loss
Input Impedance	50 Ohms Nominal		
VSWR @ Fc	1.4 :1 Max		
Wavelength	325-365 nm		
Insertion Loss	5 % Max		
Reflectivity per Surface	1 % Max		
Anti-Reflection Coating	MIL-C-48497		
Optical Power Density	N/A W/mm ²		
Contrast Ratio	1000 :1 Min		
Polarization	90 ° To Mounting Plane		

Wavelength (nm)	325	365
Operational RF Power (W)	2.5	2.5
Bragg Angle (mr)	5.7	6.4
Beam Separation (mr)	11.4	12.8

Beam Diameter (μm)	70	70
<i>at Wavelength (nm)</i>	325	365
Diffraction Efficiency (%)	80	80
Rise Time (nsec)	10	10
Modulation Bandwidth	100	100
Beam Ellipticity	NA	NA

*Active Aperture: Aperture over which performance specifications apply.

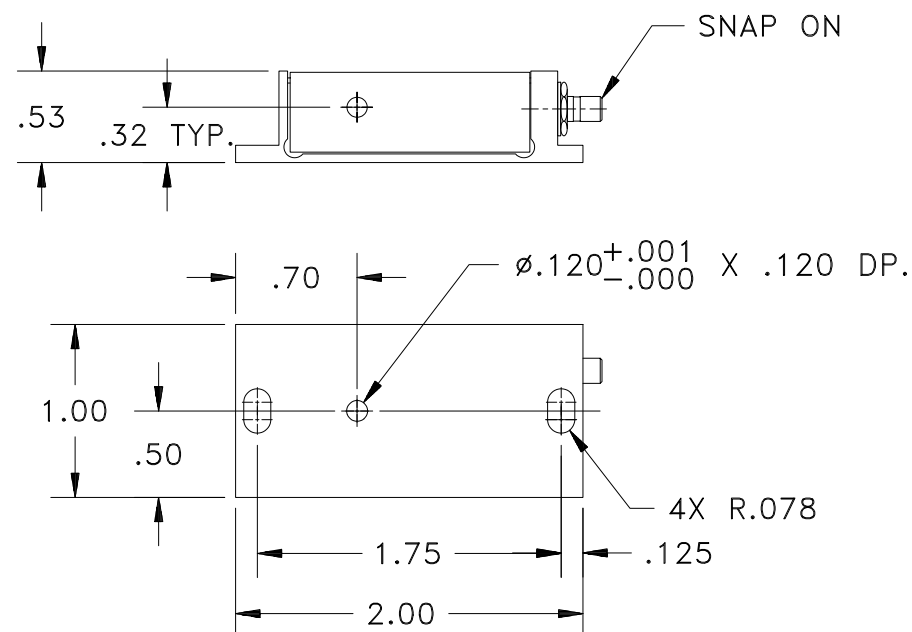

* Saturation RF Power is 3.4 Watts

THIS DOCUMENT IS THE PROPERTY OF GOOCH AND HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH AND HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH AND HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Gerl Scholz 10/8/2013			
MATERIAL:	CHK		DESCRIPTION: AOMO 3200-1210 325 -365nm (UV)		
	APP				
FINISH:	APP		PART NUMBER: 97-02377-01	REV: D	SHEET 1 OF 1