

SPECIFICATIONS

AO Medium	TeO ₂		
Acoustic Velocity	4.2 mm/μs		
Active Aperture*	2.5 mm 'L' X	1.5 mm 'H'	
Center Frequency (Fc)	350 MHz		
RF Bandwidth	50 MHz @	-10 dB	Return Loss
Input Impedance	50 Ohms Nominal		
VSWR @ Fc	1.5 :1 Max		
Wavelength	470-850 nm		
Insertion Loss	4 % Max		
Reflectivity per Surface	1 % Max		
Anti-Reflection Coating	MIL-C-48497		
Optical Power Density	250 W/mm ²		
Contrast Ratio	1000 :1 Min		
Polarization	90 ° To Mounting Plane		


PERFORMANCE VS WAVELENGTH

Wavelength (nm)	488	532	633	800
Operational RF Power (W)	0.5	0.7	1.0	1.5
Bragg Angle (mr)	20.3	22.2	26.4	33.3
Beam Separation (mr)	40.6	44.4	52.8	66.6

PERFORMANCE VS BEAM DIAMETER

Beam Diameter (μm)	800	800	800	800
at Wavelength (nm)	488	532	633	800
Diffraction Efficiency (%)	85	85	80	80
Rise Time (nsec)	128	128	128	128

Outline Drawing:

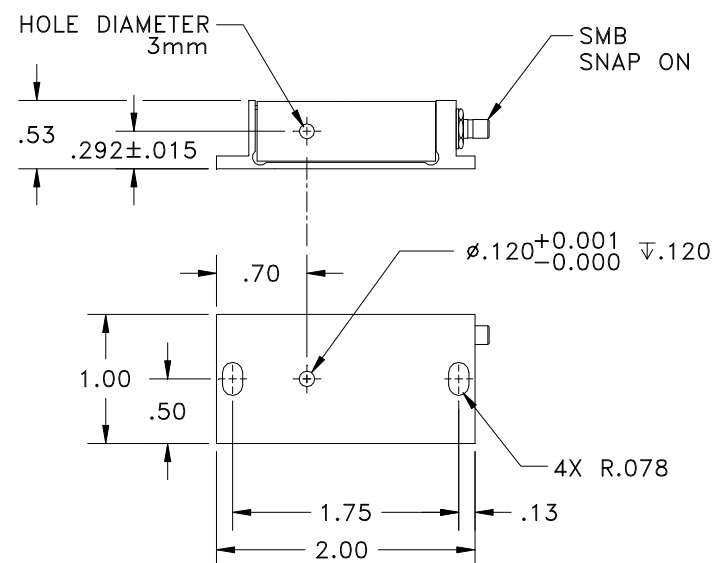

Document

10/31/13

Control

Notes:

THIS DOCUMENT IS THE PROPERTY OF GOOCH AND HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH AND HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH AND HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Geri Scholz 10/8/2013	 AOMO 3350-125 350 MHz Frequency Shifter		
MATERIAL:	CHK				
FINISH:	APP				
	APP				
			PART NUMBER:	97-03152-01	REV: C
			SHEET 1 OF 1		

*Active Aperture: Aperture over which performance specifications apply.