

SPECIFICATIONS

AO Medium	TeO ₂		
Acoustic Velocity	4.2 mm/μs		
Active Aperture*	2.5 mm 'L' X	1.5 mm 'H'	
Center Frequency (Fc)	270 MHz		
RF Bandwidth	50 MHz @	-10 dB Return Loss	
Input Impedance	50 Ohms Nominal		
VSWR @ Fc	1.3 :1 Max		
Wavelength	470-690 nm		
Insertion Loss	4 % Max		
Reflectivity per Surface	1 % Max		
Anti-Reflection Coating	MIL-C-48497		
Optical Power Density	250 W/mm ²		
Contrast Ratio	1000 :1 Min		
Polarization	90 ° To Mounting Plane		

PERFORMANCE VS WAVELENGTH

Wavelength (nm)	470	532	633	690
Saturation RF Power (W)	0.4	0.6	0.9	1.1
Bragg Angle (mr)	15.1	17.1	20.3	22.2
Beam Separation (mr)	30.2	34.2	40.6	44.4

PERFORMANCE VS BEAM DIAMETER

Beam Diameter (μm)	1000	1000	1000	1000
at Wavelength (nm)	470	532	633	690
Diffraction Efficiency (%)	85	85	85	85
Rise Time (nsec)	159	159	159	159


Document

02/12/16

Control

*Active Aperture: Aperture over which performance specifications apply.

Outline Drawing:

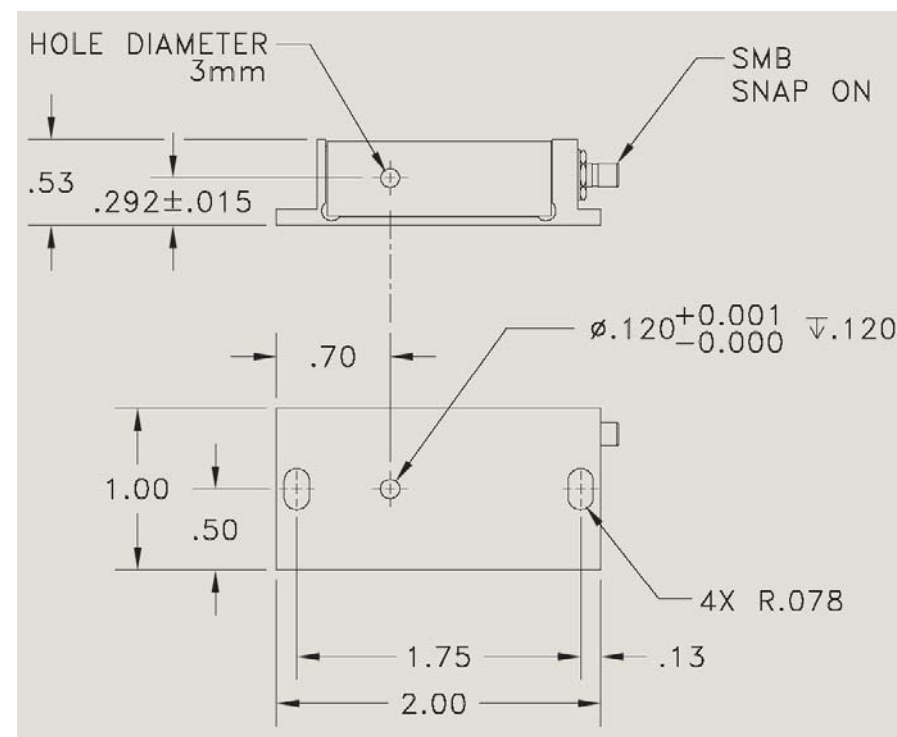

Notes:

- Measurements are in inches unless specified otherwise.

THIS DOCUMENT IS THE PROPERTY OF GOOCH AND HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH AND HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH AND HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Geri Scholz 2/2/2016	Gooch & Housego		
MATERIAL:	CHK		DESCRIPTION: AOMO 3270-125 270 MHz Frequency Shifter		
FINISH:	APP				
	APP		PART NUMBER: 97-03348-01	REV: 1	SHEET 1 OF 1