


SPECIFICATIONS

AO Medium	TeO ₂
Acoustic Mode	Shear, Off- Axis
Acoustic Velocity	657 M/sec
Wavelength	780 nm
Input Polarization	Linear, Horizontal
Output Polarization	Linear, Vertical
Insertion Loss	< 5%
Center Frequency (Fc)	40 MHz
RF Bandwidth	1 MHz
RF Power	<.2W
Active Aperture	5x10mm
Average Diffraction Efficiency	N/A
Flatness Across Bandwidth	N/A
Min Diffraction Efficiency	50%
Peak Valley at 633 nm	
RMS at 633 nm	
VSWR@40MHz	<1.3:1
Scan Angle	N/A
Time Bandwidth	N/A

OUTLINE DRAWING

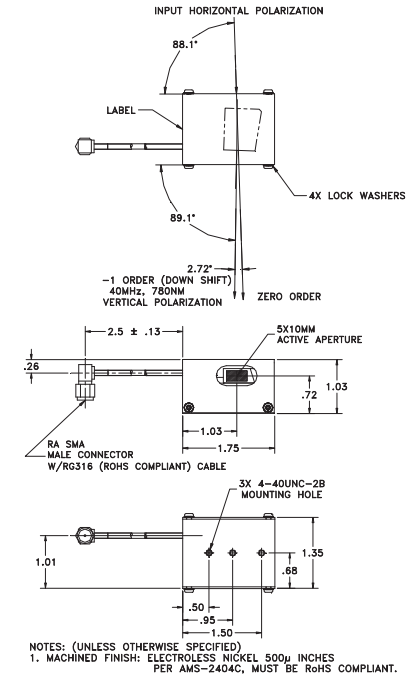

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MACHINED FINISH: ELECTROLESS NICKEL 500μ INCHES PER AMS-2404C, MUST BE RoHS COMPLIANT.

2. MECHANICAL OUTLINE 97-03304-01-15.

Document

09/04/15

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX .XXX	DR	Geri Scholz 9/2/2015	Gooch & Housego	
MATERIAL:	CHK		DESCRIPTION: AODF 4040-192	
FINISH: 	APP		ROHS	
	APP		PART NUMBER: 97-03304-01	REV: 3
			SHEET 1 OF 1	