

SPECIFICATIONS

AO Medium	Crystalline Quartz
Acoustic Velocity	5.74 mm/μs
Active Aperture*	0.5 mm 'L' X 0.24 mm 'H'
Center Frequency (Fc)	250 MHz
RF Bandwidth	60 MHz
Input Impedance	50 Ohms Nominal
VSWR @ Fc	1.5:1 Max
Wavelength	355 nm
Insertion Loss	2 % Max
Anti-Reflection Coating	MIL-C -48497
Optical Damage Threshold	1 MW/cm ²
Contrast Ratio	100:1 Min
Polarization	Perpendicular ° To Acoustic Wave

PERFORMANCE VS WAVELENGTH

Wavelength (nm)	355
Operational RF Power (W)	2.5
Bragg Angle (mr)	7.7
Beam Separation (mr)	15.4

PERFORMANCE VS BEAM DIAMETER

Beam Diameter (μm)	125
at Wavelength (nm)	355
Diffraction Efficiency (%) min	75
Rise Time (nsec)	12.5


Special Testing

Crosstalk 'on'
Crosstalk 'off'

Min Units Max

*Active Aperture: Aperture over which performance specifications apply.

Outline Drawing:

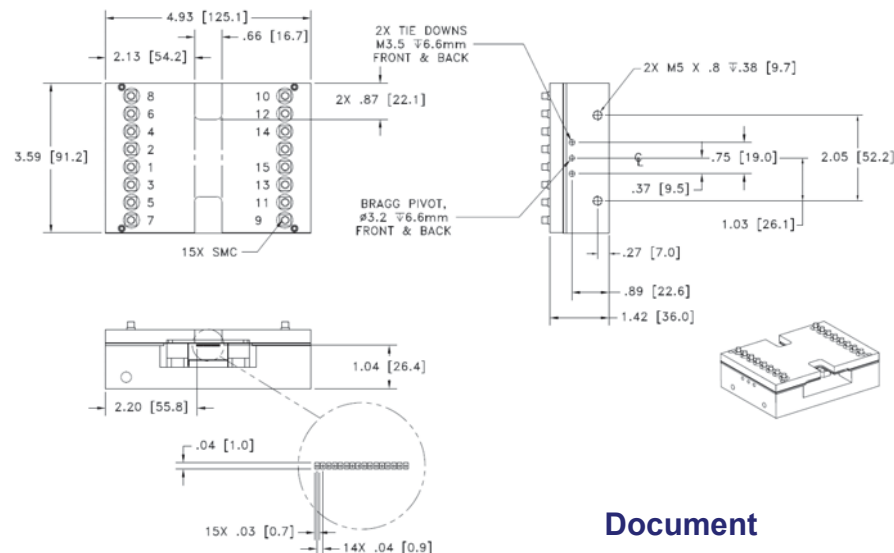

Document

08/24/21

Control

Number of Channels: 16; Channel Pitch: 0.9mm
Max RF power with all channels 'on' is 48 watts (3w per channel) with water cooling
Device is water cooled
Channel Crosstalk: < -28dB , one channel 'off' all others 'on'
Connectors: SMC Blk Hd mount straight male jack
Coolant flow rate: 0.33gpm @ 25 degree C.

THIS DOCUMENT IS THE PROPERTY OF GOOCH AND HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES GOOCH AND HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH AND HOUSEGO.

TOLERANCES: XX ± .01 .XXX ± .005	DR	Tom Ng 8/18/2021	Gooch & Housego		
MATERIAL:	CHK		DESCRIPTION: AOMC 250/16		
FINISH:	APP		.355um 16CH		
	APP		PART NUMBER: 97-03472-01	REV: 1	SHEET 1 OF 1