



PLANTAGEN®

LILLESAND BENCH
563044




PLANTAGEN®


Parts list

Code	Diagram	QTY
A		1 pc
B		1 pc
C		1 pc
D		1 pc
E		9pcs
F		1 pc


Assembly steps

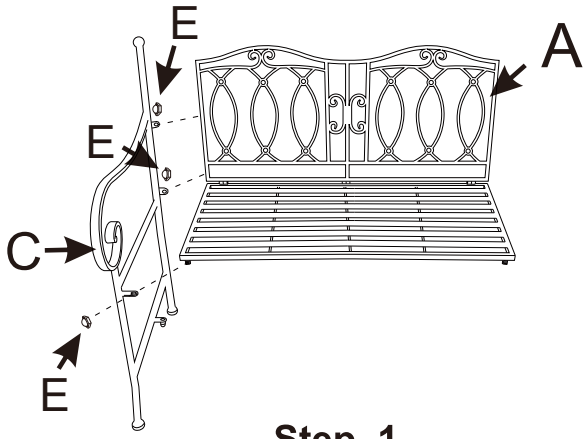

Step 1

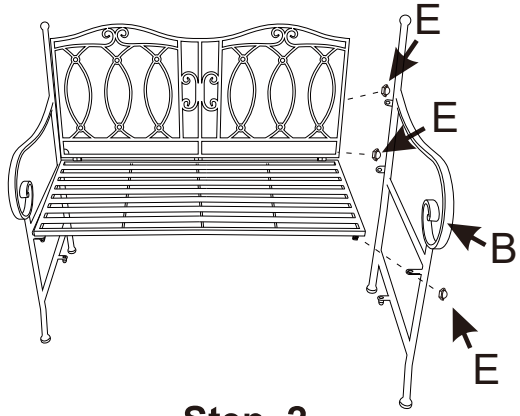

Step 2

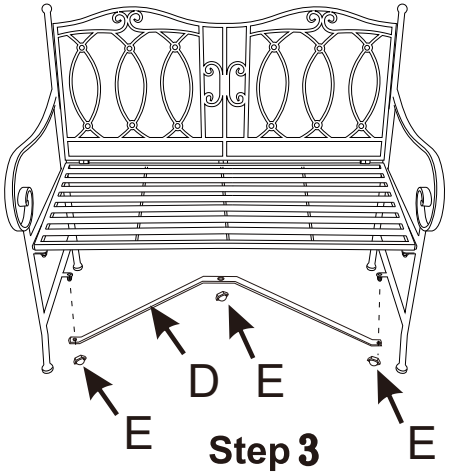

Step 3



Step 4

PLANTAGEN®

STEEL

Clean regularly

When dust appears on product surface, please use soft cotton cloth/wet cloth to wipe it regularly.
Please don't use boiled water for cleaning up, use clean water. Suggest to wipe them up with dry cotton cloth.

Keep away from moisture

In case of heavy fog or raining days, droplets on the steel product surface should be removed promptly with dry cotton cloth.

Avoid impact and scratch

Steel products should be moved-if necessary- with due caution. They should be placed where hard objects are avoidable. Don't move them too frequently. Place them on smooth surface to keep them stable.

Stay away from acid & base

Acid and base can corrode steel products severely. In case steel products touch acid material or base (e.g. soap-suds, soda), wash it away with water and then wipe up the steel products with dry cotton cloth.

Avoid long-time exposure to sunlight

It's suggested to place steel products outdoor with shelter. If steel products are exposed directly to sunlight for a long time, color on product surface may change, coating may crack or peel off.

Remove the rust

If there is a little rust on steel products, don't polish them with sand paper; it is suggested that you apply a little engine oil with cotton cloth to the rusty part and then clean with cloth a few minutes later.